

\*Always verify tips or orifices you received are the size which you require before using with chemical. Chemical rates need to be obtained from your chemical dealer.

## AIXR TeeJet®

### Air Induction XR Flat Spray Tips



#### Typical Applications:

Air induction design provides good drift control while still providing coverage. Ideal for a wide range of application including post-emerge systemic products.


#### Features:

- 110° wide, tapered flat spray angle with air induction technology offers better drift management.
- Made of a two-piece UHMWPE polymer construction with VisiFlo® color-coding. UHMWPE provides excellent chemical resistance, including acids, as well as exceptional wear life.
- Compact size to prevent tip damage.
- Depending on the chemical, produces large air-filled drops through a Venturi air aspirator.
- Removable pre-orifice.
- Available in nine tip capacities with a wide operating pressure range: 15-90 PSI.
- Automatic spray alignment with 114441\*-CELR Quick TeeJet cap and gasket for capacities 01 thru 06.
- Automatic spray alignment with 11443\*-CELR Quick TeeJet cap and gasket for capacities 10 and 12.

| PART NO.                    | LIST PRICE     |
|-----------------------------|----------------|
| <b>SIZES 01-06</b>          |                |
| AIXR110##-VP (01-06).....   | <b>\$9.66</b>  |
| AIXR110##-VP-C (01-06)..... | <b>\$11.74</b> |
| <b>REQUIRED CAP</b>         |                |
| 114441A*-NYR.....           | <b>\$1.39</b>  |
| *replaces cap 25612*-NYR    |                |
| <b>SIZES 8-10</b>           |                |
| AIXR110##VP (8-10).....     | <b>\$11.32</b> |
| AIXR110##VP-CE (8-10).....  | <b>\$13.40</b> |
| <b>REQUIRED CAP</b>         |                |
| 114443A*-CELR.....          | <b>\$1.58</b>  |
| *replaces cap 25598*-NYR    |                |




# - Specify Tip Size      - C / CE - Includes Quick TeeJet Cap & Gasket  
 \* - Specify Cap Color

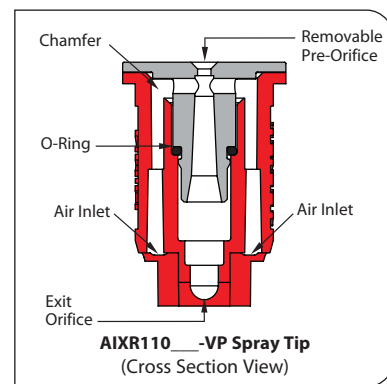


| Tip Size            | PSI               | DROPS PER GPM      | CAPACITY ONE NOZZLE IN GPM | CAPACITY ONE NOZZLE IN OZ./MIN. | 20"   |       |       |       |        |        |        |        |                          |       |       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|---------------------|-------------------|--------------------|----------------------------|---------------------------------|-------|-------|-------|-------|--------|--------|--------|--------|--------------------------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|                     |                   |                    |                            |                                 | GPA   |       |       |       |        |        |        |        | GALLONS PER 1000 SQ. FT. |       |       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                     |                   |                    |                            |                                 | 4 MPH | 5 MPH | 6 MPH | 8 MPH | 10 MPH | 12 MPH | 15 MPH | 20 MPH | 2 MPH                    | 3 MPH | 4 MPH | 5 MPH |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| AIXR110015<br>(100) | 15                | XC                 | 0.092                      | 12                              | 6.8   | 5.5   | 4.6   | 3.4   | 2.7    | 2.3    | 1.8    | 1.4    | 0.31                     | 0.21  | 0.16  | 0.13  | 0.11 | 0.14 | 8.2  | 6.5  | 5.4  | 4.1  | 3.3  | 2.7  | 2.2  | 1.6  | 0.37 | 0.25 | 0.19 | 0.15 |      |      |      |
|                     | AIXR11002<br>(50) | 15                 | XC                         | 0.12                            | 15    | 8.9   | 7.1   | 5.9   | 4.5    | 3.6    | 3.0    | 2.4    | 1.8                      | 0.41  | 0.27  | 0.20  | 0.16 | 0.14 | 19   | 10.4 | 8.3  | 6.9  | 5.2  | 4.2  | 3.5  | 2.8  | 2.1  | 0.48 | 0.32 | 0.24 | 0.19 |      |      |
|                     |                   | AIXR110025<br>(50) | 15                         | XC                              | 0.15  | 19    | 11.1  | 8.9   | 7.4    | 5.6    | 4.5    | 3.7    | 3.0                      | 2.2   | 0.51  | 0.34  | 0.26 | 0.20 | 0.20 | 20   | 11.1 | 8.9  | 7.4  | 5.6  | 4.5  | 3.7  | 3.0  | 2.2  | 0.51 | 0.34 | 0.26 | 0.20 |      |
|                     |                   |                    | AIXR11003<br>(50)          | 15                              | XC    | 0.18  | 23    | 13.4  | 10.7   | 8.9    | 6.7    | 5.3    | 4.5                      | 3.6   | 2.7   | 0.61  | 0.41 | 0.31 | 0.24 | 0.22 | 28   | 16.3 | 13.1 | 10.9 | 8.2  | 6.5  | 5.4  | 4.4  | 3.3  | 0.75 | 0.50 | 0.37 | 0.30 |
|                     |                   |                    |                            | AIXR11004<br>(50)               | 15    | XC    | 0.21  | 27    | 15.6   | 12.5   | 10.4   | 7.8    | 6.2                      | 5.2   | 4.2   | 3.1   | 0.71 | 0.48 | 0.36 | 0.29 | 0.24 | 31   | 17.8 | 14.3 | 11.9 | 8.9  | 7.1  | 5.9  | 4.8  | 3.6  | 0.82 | 0.54 | 0.41 |
| AIXR11005<br>(50)   |                   |                    |                            |                                 | 15    | XC    | 0.24  | 31    | 17.8   | 14.3   | 11.9   | 8.9    | 7.1                      | 5.9   | 4.8   | 3.6   | 0.82 | 0.54 | 0.41 | 0.33 | 0.28 | 36   | 21   | 16.6 | 13.9 | 10.4 | 8.3  | 6.9  | 5.5  | 4.2  | 0.95 | 0.63 | 0.48 |
|                     | AIXR11006<br>(50) |                    |                            |                                 | 15    | XC    | 0.31  | 40    | 23     | 18.4   | 15.3   | 11.5   | 9.2                      | 7.7   | 6.1   | 4.6   | 1.1  | 0.70 | 0.53 | 0.42 | 0.35 | 45   | 26   | 21   | 17.3 | 13.0 | 10.4 | 8.7  | 6.9  | 5.2  | 1.2  | 0.79 | 0.60 |
|                     |                   | AIXR11008<br>(50)  |                            |                                 | 15    | XC    | 0.42  | 54    | 31     | 25     | 21     | 15.6   | 12.5                     | 10.4  | 8.3   | 6.2   | 1.4  | 0.95 | 0.71 | 0.57 | 0.40 | 51   | 30   | 24   | 19.8 | 14.9 | 11.9 | 9.9  | 7.9  | 5.9  | 1.4  | 0.91 | 0.68 |
|                     |                   |                    | AIXR11010                  |                                 | 15    | XC    | 0.49  | 63    | 36     | 29     | 24     | 18.2   | 14.6                     | 12.1  | 9.7   | 7.3   | 1.7  | 1.1  | 0.83 | 0.67 | 0.45 | 58   | 33   | 27   | 22   | 16.7 | 13.4 | 11.1 | 8.9  | 6.7  | 1.5  | 1.0  | 0.77 |

| CONTACT PRODUCT | SYSTEMIC PRODUCT | DRIFT MANAGEMENT |
|-----------------|------------------|------------------|
| GOOD            | EXCELLENT        | EXCELLENT        |

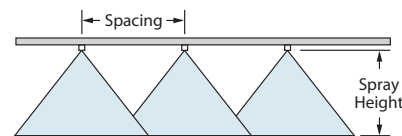

#### Optimum Spray Height



#### How to order:

Specify tip number.

Example:

- AIXR11004VP - Polymer with VisiFlo color-coding
- AIXR11003VP-CE - Polymer with VisiFlo color-coding, Includes Quick TeeJet cap and gasket

**Note:** Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).