

\*Always verify tips or orifices you received are the size which you require before using with chemical. Chemical rates need to be obtained from your chemical dealer.

TEEJET EVEN

# TeeJet® Even Flat Spray Tips


**EVEN SPRAY**

### Features:

- Ideal for banding over the row or in row middles.
- Provides uniform distribution throughout the flat spray pattern.
- Easily mounted on spray boom or planter.
- Available with VisiFlo® color-coding in stainless steel or all stainless steel, hardened stainless steel and brass.




TEEJET - EVEN	
PART NO.	LIST PRICE
TP80##E(Brass).....	\$5.66
TP80##EVS.....	\$8.29
TP80##E-SS.....	\$14.53
TP80##E-HSS.....	\$19.98
## - Specify Tip Size	
VS - Stainless Steel w/ VisiFlo® Color Coding	
SS - Stainless Steel	
HSS - Hardened Stainless Steel	
REQUIRED CAP	
114441A-*CELR.....	\$1.39
*replaces cap 25612-*NYR	
* - Specify Cap Color	



TIPO	PSI	CAPACITY ONE NOZZLE IN GPM	GPA @ 30° Field Acres											
			3 MPH	3.5 MPH	4 MPH	4.5 MPH	5 MPH	5.5 MPH	6 MPH	6.5 MPH	7 MPH	7.5 MPH	8 MPH	8.5 MPH
TP4001E†	20	0.071	4.7	4.0	3.5	3.1	2.8	2.6	2.3	2.2	2.0	1.9	1.8	1.7
TP6501E†	30	0.087	5.7	4.9	4.3	3.8	3.4	3.1	2.9	2.7	2.5	2.3	2.2	2.0
TP8001E	40	0.10	6.6	5.7	5.0	4.4	4.0	3.6	3.3	3.0	2.8	2.6	2.5	2.3
TP9501E (100)	50	0.11	7.3	6.2	5.4	4.8	4.4	4.0	3.6	3.4	3.1	2.9	2.7	2.6
TP40015E†	20	0.11	7.3	6.2	5.4	4.8	4.4	4.0	3.6	3.4	3.1	2.9	2.7	2.6
TP65015E†	30	0.13	8.6	7.4	6.4	5.7	5.1	4.7	4.3	4.0	3.7	3.4	3.2	3.0
TP80015E	40	0.15	9.9	8.5	7.4	6.6	5.9	5.4	5.0	4.6	4.2	4.0	3.7	3.5
TP95015E (100)	50	0.17	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0
TP40018E†	60	0.18	11.9	10.2	8.9	7.9	7.1	6.5	5.9	5.5	5.1	4.8	4.5	4.2
TP4002E†	20	0.14	9.2	7.9	6.9	6.2	5.5	5.0	4.6	4.3	4.0	3.7	3.5	3.3
TP6502E†	30	0.17	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0
TP8002E	40	0.20	13.2	11.3	9.9	8.8	7.9	7.2	6.6	6.1	5.7	5.3	5.0	4.7
TP9502E (50)	50	0.22	14.5	12.4	10.9	9.7	8.7	7.9	7.3	6.7	6.2	5.8	5.4	5.1
TP40025E†	60	0.24	15.8	13.6	11.9	10.6	9.5	8.6	7.9	7.3	6.8	6.3	5.9	5.6
TP4003E†	20	0.21	13.9	11.9	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	5.2	4.9
TP6503E†	30	0.26	17.2	14.7	12.9	11.4	10.3	9.4	8.6	7.9	7.4	6.9	6.4	6.1
TP8003E	40	0.30	19.8	17.0	14.9	13.2	11.9	10.8	9.9	9.1	8.5	7.9	7.4	7.0
TP9503E (50)	50	0.34	22	19.2	16.8	15.0	13.5	12.2	11.2	10.4	9.6	9.0	8.4	7.9
TP40035E†	60	0.37	24	21	18.3	16.3	14.7	13.3	12.2	11.3	10.5	9.8	9.2	8.6
TP4004E†	20	0.28	18.5	15.8	13.9	12.3	11.1	10.1	9.2	8.5	7.9	7.4	6.9	6.5
TP6504E†	30	0.35	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2
TP8004E	40	0.40	26	23	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3
TP9504E (50)	50	0.45	30	25	22	19.8	17.8	16.2	14.9	13.7	12.7	11.9	11.1	10.5
TP40045E†	60	0.49	32	28	24	22	19.4	17.6	16.2	14.9	13.9	12.9	12.1	11.4
TP4005E†	20	0.35	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2
TP6505E†	30	0.43	28	24	21	18.9	17.0	15.5	14.2	13.1	12.2	11.4	10.6	10.0
TP8005E	40	0.50	33	28	25	22	19.8	18.0	16.5	15.2	14.1	13.2	12.4	11.6
TP9505E (50)	50	0.56	37	32	28	25	22	20	18.5	17.1	15.8	14.8	13.9	13.0
TP40055E†	60	0.61	40	35	30	27	24	22	20	18.6	17.3	16.1	15.1	14.2
TP4006E†	20	0.42	28	24	21	18.5	16.6	15.1	13.9	12.8	11.9	11.1	10.4	9.8
TP6506E†	30	0.52	34	29	26	23	21	18.7	17.2	15.8	14.7	13.7	12.9	12.1
TP8006E	40	0.60	40	34	30	26	24	22	19.8	18.3	17.0	15.8	14.9	14.0
TP9506E (50)	50	0.67	44	38	33	29	27	24	22	20	19.0	17.7	16.6	15.6
TP40065E†	60	0.73	48	41	36	32	29	26	24	22	21	19.3	18.1	17.0
TP6508E†	20	0.57	38	32	28	25	23	21	18.8	17.4	16.1	15.0	14.1	13.3
TP11008E†	30	0.69	46	39	34	30	27	25	23	21	19.5	18.2	17.1	16.1
TP8008E	40	0.80	53	45	40	35	32	29	26	24	23	21	19.8	18.6
TP9508E (50)	50	0.89	59	50	44	39	35	32	29	27	25	23	22	21
TP40085E†	60	0.98	65	55	49	43	39	35	32	30	28	26	24	23
TP4010E†	20	0.71	47	40	35	31	28	26	23	22	20	18.7	17.6	16.5
TP6510E†	30	0.87	57	49	43	38	34	31	29	27	25	23	22	20
TP8010E†	40	1.00	66	57	50	44	40	36	33	30	28	26	25	23
TP11010E† (24)	50	1.12	74	63	55	49	44	40	37	34	32	30	28	26
TP6515E†	60	1.22	81	69	60	54	48	44	40	37	35	32	30	28
TP8015E†	20	1.06	70	60	52	47	42	38	35	32	30	28	26	25
TP6515E†	30	1.30	86	74	64	57	51	47	43	40	37	34	32	30
TP8015E†	40	1.50	99	85	74	66	59	54	50	46	42	40	37	35
TP11015E†	50	1.68	111	95	83	74	67	60	55	51	48	44	42	39
	60	1.84	121	104	91	81	73	66	61	56	52	49	46	43

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).

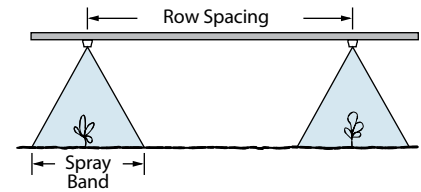

TIPO	GPA					GPA CONVERSION FACTORS*	
	40°	65°	80°	95°	110°	20"	30"
8"	11"	6"	5"	4"	3"	2.50	3.75
10"	14"	8"	6"	5"	4"	2.00	3.00
12"	16"	9"	7"	5"	4"	1.67	2.50
15"	21"	12"	9"	7"	5"	1.33	2.00

\*To find GPA rate on band widths, multiply the tabulated GPA for ROW SPACING by conversion factors.

### How to order:

Specify tip number.

Examples:

- TP8002EVS - Stainless Steel with VisiFlo color-coding
- TP8002E-HSS - Hardened Stainless Steel
- TP8002E-SS - Stainless Steel
- TP8002E - Brass