

*Always verify tips or orifices you received are the size which you require before using with chemical. Chemical rates need to be obtained from your chemical dealer.

StreamJet Solid Stream Spray Nozzles



STREAMJET	
PART NO.	LIST PRICE
TP00##-SS.....	\$14.28
## - Specify Tip Size	
SS - Stainless Steel	
REQUIRED CAP	
114445A-*CELR.....	\$1.58
*replaces cap 25608-*NYR	
* - Specify Cap Color	



THREADED STREAMJET	
PART NO.	LIST PRICE
H1/4U-SS00##.....	\$19.05
## - Specify Tip Size	
SS - Stainless Steel	
Uses below cap (QJ4676-1/4-NYR)	

QJ4676-1/4-NYR
 • Cap for H1/4U Nozzles

Part#	Price
QJ4676-1/4-NYR	\$4.58


Features:

- Permits banding fluids at high rig speeds.
- Large orifices with no internal obstructions permit no-clogging suspension applications.
- Lower drift potential.
- 1/4" Male Pipe Threads

How to order:

Specify nozzle number & material.

Example: H1/4U-SS0010 - Stainless Steel

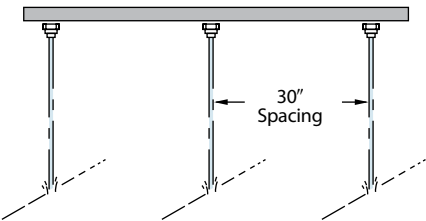

NOZZLE	PSI	CAPACITY ONE NOZZLE IN GPM	GPA \triangle 30" \triangle								
			4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	14 MPH	16 MPH	18 MPH	20 MPH
TP0001-SS	10	0.050	2.5	1.7	1.2	0.99	0.83	0.71	0.62	0.55	0.50
	20	0.071	3.5	2.3	1.8	1.4	1.2	1.0	0.88	0.78	0.70
	30	0.087	4.3	2.9	2.2	1.7	1.4	1.2	1.1	0.96	0.86
	40	0.10	5.0	3.3	2.5	2.0	1.7	1.4	1.2	1.1	0.99
TP00015-SS	10	0.075	3.7	2.5	1.9	1.5	1.2	1.1	0.93	0.83	0.74
	20	0.11	5.4	3.6	2.7	2.2	1.8	1.6	1.4	1.2	1.1
	30	0.13	6.4	4.3	3.2	2.6	2.1	1.8	1.6	1.4	1.3
	40	0.15	7.4	5.0	3.7	3.0	2.5	2.1	1.9	1.7	1.5
H1/4U-SS0002 TP0002-SS	10	0.10	5.0	3.3	2.5	2.0	1.7	1.4	1.2	1.1	0.99
	20	0.14	6.9	4.6	3.5	2.8	2.3	2.0	1.7	1.5	1.4
	30	0.17	8.4	5.6	4.2	3.4	2.8	2.4	2.1	1.9	1.7
	40	0.20	9.9	6.6	5.0	4.0	3.3	2.8	2.5	2.2	2.0
H1/4U-SS0003 TP0003-SS	10	0.15	7.4	5.0	3.7	3.0	2.5	2.1	1.9	1.7	1.5
	20	0.21	10.4	6.9	5.2	4.2	3.5	3.0	2.6	2.3	2.1
	30	0.26	12.9	8.6	6.4	5.1	4.3	3.7	3.2	2.9	2.6
	40	0.30	14.9	9.9	7.4	5.9	5.0	4.2	3.7	3.3	3.0
H1/4U-SS0004 TP0004-SS	10	0.20	9.9	6.6	5.0	4.0	3.3	2.8	2.5	2.2	2.0
	20	0.28	13.9	9.2	6.9	5.5	4.6	4.0	3.5	3.1	2.8
	30	0.35	17.3	11.6	8.7	6.9	5.8	5.0	4.3	3.9	3.5
	40	0.40	19.8	13.2	9.9	7.9	6.6	5.7	5.0	4.4	4.0
H1/4U-SS0006 TP0006-SS	10	0.30	14.9	9.9	7.4	5.9	5.0	4.2	3.7	3.3	3.0
	20	0.42	21	13.9	10.4	8.3	6.9	5.9	5.2	4.6	4.2
	30	0.52	26	17.2	12.9	10.3	8.6	7.4	6.4	5.7	5.1
	40	0.60	30	19.8	14.9	11.9	9.9	8.5	7.4	6.6	5.9
H1/4U-SS0008 TP0008-SS	10	0.40	19.8	13.2	9.9	7.9	6.6	5.7	5.0	4.4	4.0
	20	0.57	28	18.8	14.1	11.3	9.4	8.1	7.1	6.3	5.6
	30	0.69	34	23	17.1	13.7	11.4	9.8	8.5	7.6	6.8
	40	0.80	40	26	19.8	15.8	13.2	11.3	9.9	8.8	7.9
H1/4U-SS0010 TP0010-SS	10	0.50	25	16.5	12.4	9.9	8.3	7.1	6.2	5.5	5.0
	20	0.71	35	23	17.6	14.1	11.7	10.0	8.8	7.8	7.0
	30	0.87	43	29	22	17.2	14.4	12.3	10.8	9.6	8.6
	40	1.00	50	33	25	19.8	16.5	14.1	12.4	11.0	9.9
H1/4U-SS0015 TP0015-SS	10	0.75	37	25	19	14.9	12.4	10.6	9.3	8.3	7.4
	20	1.06	52	35	26	21	17.5	15.0	13.1	11.7	10.5
	30	1.30	64	43	32	26	21	18.4	16.1	14.3	12.9
	40	1.50	74	50	37	30	25	21	18.6	16.5	14.9
H1/4U-SS0020 TP0020-SS	10	1.00	50	33	25	19.8	16.5	14.1	12.4	11.0	9.9
	20	1.41	70	47	35	28	23	19.9	17.4	15.5	14.0
	30	1.73	86	57	43	34	29	24	21	19.0	17.1
	40	2.00	99	66	50	40	33	28	25	22	19.8
H1/4U-SS0030 TP0030-SS	10	1.50	74	50	37	30	25	21	18.6	16.5	14.9
	20	2.12	105	70	52	42	35	30	26	23	21
	30	2.60	129	86	64	51	43	37	32	29	26
	40	3.00	149	99	74	59	50	42	37	33	30
H1/4U-SS0040 TP0040-SS	10	2.00	99	66	50	40	33	28	25	22	20
	20	2.83	140	93	70	56	47	40	35	31	28
	30	3.46	171	114	86	69	57	49	43	38	34
	40	4.00	198	132	99	79	66	57	50	44	40
H1/4U-SS0050	10	2.50	124	83	62	50	41	35	31	28	25
	20	3.54	175	117	88	70	58	50	44	39	35
	30	4.33	214	143	107	86	71	61	54	48	43
	40	5.00	248	165	124	99	83	71	62	55	50
H1/4U-SS0060	10	3.00	149	99	74	59	50	42	37	33	30
	20	4.24	210	140	105	84	70	60	52	47	42
	30	5.20	257	172	129	103	86	74	64	57	51
	40	6.00	297	198	149	119	99	85	74	66	59

